


# MONUMENT RECORD

Corner ID: **Per\_E05**

## Section Corner



Sections 05, 06, 07 & 08- T08N-R01W, 2nd P.M.

Perry Township, Monroe County, Indiana



**MONUMENT:** Describe monument set or found (Include material type, scribing, distance above/below grade, dimensions.)  
0.33' x 0.33' Limestone found 0.55' above grade firmly in place.

### MONUMENT LOCATION SKETCH:

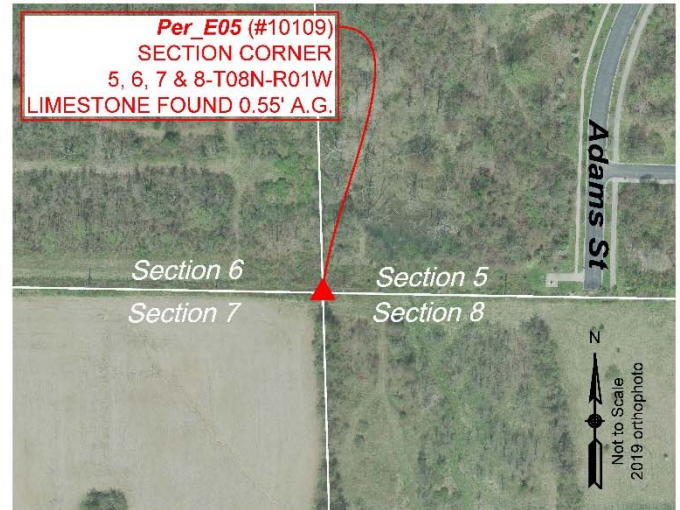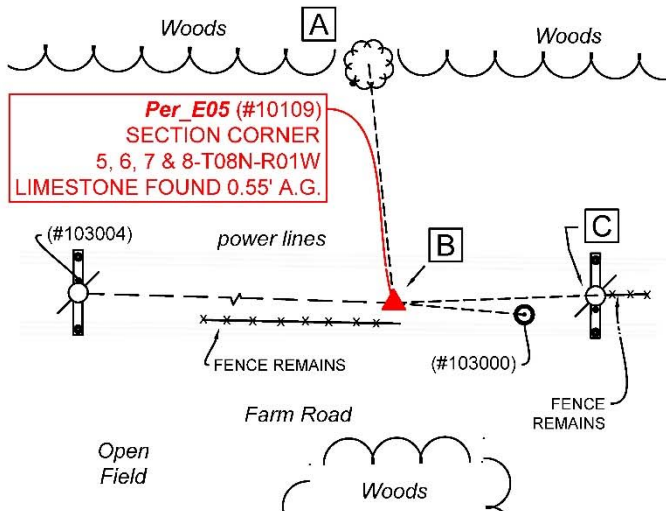

### WITNESS MONUMENT TIES

All ties to new Bearing Trees (BTs) are a mag nail set in a 1-1/2" plastic washer stamped "SURVEY MARKER - DO NOT REMOVE" and hack mark at the root crown (less than 12" above ground) perpendicular to the center of the tree, unless otherwise noted. BT diameters are noted as dbh and are measured approximately 4.5' above ground. Bearings are measured from the monument to the center of the BT, distances are measured from the monument to the mag nail.

ID	BEARING	DISTANCE	DESCRIPTION
Witness A	N 6d W	37.3'	Mag nail and washer set in hack 0.5' above grade on the west side of a 1.9" osage-orange tree.
Witness B	N 0d W	0.5'	"Protect Nearby Survey Marker" sign found 3' above grade per 2007 tie sheet.
Witness C	N 88d E	31.8'	Mag nail found on south side of 4.7" power line pole 5.3' above grade per 2007 tie sheet.
(#103000)	S 85d E	20.5'	Rebar with "Bynum Fanyo 29500010" cap found 0.5' above grade per 2007 tie sheet.
(#103004)	N 88d W	166.2'	Mag nail and washer set on north side of 4.7" power line pole 4.7' above grade.



OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • surveyoroffice@co.monroe.in.us

Page 1 of 3




# MONUMENT RECORD

Corner ID: **Per\_E05**

## Section Corner

Sections 05, 06, 07 & 08- T08N-R01W, 2nd P.M.

Perry Township, Monroe County, Indiana



**PHOTO IDENTIFIED:** Photo Date: 12/22/2021



Photo Orientation & Description: Per\_E05 from above



Photo Orientation & Description: Per\_E05 from north



Photo Orientation & Description: Per\_E05 from south



Photo Orientation & Description: Per\_E05 from east



**OFFICE OF THE MONROE COUNTY SURVEYOR • Trohn Enright-Randolph**

119 W 7th Street, Bloomington, IN 47404 • 812-349-2570 • [surveyorsoffice@co.monroe.in.us](mailto:surveyorsoffice@co.monroe.in.us)




# MONUMENT RECORD

Corner ID: **Per\_E05**

## Section Corner

Sections 05, 06, 07 & 08- T08N-R01W, 2nd P.M.  
Perry Township, Monroe County, Indiana



**ORIGINAL OR SUBSEQUENT SURVEY EVIDENCE FOUND:** *Include, search area or areas, search procedure, etc.*

*Date of Field work/Search:* 12/22/2021 *By:* JG *Monument Found:* Limestone *BTs or Reference Objects Found:* Found Witnesses B, C, D & E from 10/2007 Monument Record *Project #:* Per\_C07 *Field Book:* 54/39 & 54/45 *Equipment:* The basis of bearings is Grid North System NAD83(2011)/Indiana West NAVD 88, Epoch 2010.0000, geoid12b\_conus.db3, US Survey Feet, derived from GPS observations utilizing the Indiana Real-Time Network (INCORS). Coordinate data was collected with a Javad Triumph LS Network Rover. Coordinates are available upon request. Distances to witness ties were collected with a Leica Disto laser distance meter. Bearings to witness ties were collected with the internal magnetic compass of the Javad Triumph LS and were automatically adjusted to grid north and are approximately shown hereon for reference. Priority should be given to provided distances over bearings. *Notes:* All witness photos on file in the Monroe County Surveyors Office.

**OTHER EVIDENCE:** *Describe corner location relative to nearby features and how to reach the corner location – note fences, roads, timber cutting lines, mow lines, clearings, plantings, streams, topo changes, etc.*

Monument is in a clearing of an electric line easement that runs east to west, north of a farm road and south of wooded area that contains many small creeks. The best way to access it is by taking Adams Street, south of Allen Street to where Adams Street ends. Looking west, one can follow the series of powerline poles to Per\_E05. From Per\_E05, looking south, on the east side there is a wooded area and on the west there is an open field.

**MONUMENT PRESERVATION:** *Describe work done to preserve existing monument.*


Coordinates were collected for the monument and for Witnesses #103000 & #103004. Two "Protect Nearby Survey Marker" signs already existed at this site in adequate condition. However, the sign on the wood post 12.5' south of the monument (Witness B on the 2007 Monument Record) was removed as to quell any ambiguity of the monuments true location.

**THEORY OF LOCATION:** *Describe the theory of location for acceptance of this monument. Include monument origin and associated uncertainty.*

The stone was set by the Monroe County Surveyor, Kevin Enright, on May 23, 2005 and accepted by the Monroe County Surveyor Review Board on October 9, 2007. This stone was set to replace a 10" rotted fence post with pk nail in the top which was previously regarded as the southwest corner of Section 05 Township 08 North Range 01 West. The 2007 Monument Record accepted the stone per a boundary survey by Douglas R. Curry archived by the Monroe County Surveyor as RSID003415. Historic research has not yet been performed to prove the validity of this monument.

**CERTIFICATION:**



  
Date: 02/22/2022  
Trohn Enright-Randolph  
Monroe County Surveyor



Date: 02/22/2022  
Accepted by the Monroe  
County Survey Review Board



MONUMENT RECORD  
State of Indiana - County of Monroe

Section: 05

Township: 8 North


Range: 1 West

Corner ID: Per E-05

**Monument Description & Remarks:** Set Limestone, length 0.33ft, width 0.33ft, height 0.55ft.  
Dug out old Monument (Rotted 10" diameter Post with PK nail in top). Survey Sign 4.5ft above  
ground at pt. B

**References On File:** Douglas R. Curry survey, Seminary (2004), on file in Surveyor Office

RECOVERY TIE DRAWING  
Field Book 36 Page No. 42  
Field Book 40 Page No. 6

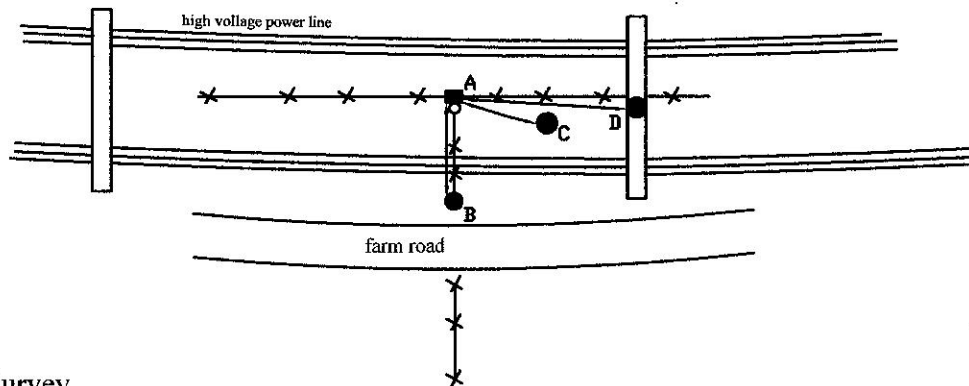

A - Limestone

B - S 87° E 12.05' to Survey  
Sign on 10" corner post


C - S 82° E 20.42' to 5/8" Rebar  
with cap, "BYNUM FANYO"

D - N 02° W 31.74' to MAG  
nail in 15" power line pole

E - North 0,50' to Survey  
Sign on metal fence post

Not To Scale  
Compass Bearing Magnetic North

I, Kevin P. Enright, Monroe County Surveyor, hereby certify that this document was prepared under my direction in accordance with the provisions of section 206 of the Indiana Code; and the above data is given under my hand and seal this 23rd day of May, 2005.



Administered by the Monroe County Surveyor Review Board

Date: 10/9/2007